



High-Efficiency 175 Watt Mid-Sized Module

The SAPC-175, SCHOTT Solar's 175 watt photovoltaic module features 16.4% encapsulated cell efficiency and 13.45% module efficiency. With a 25 year warranty, the SAPC-175 has superb durability to withstand rigorous operating conditions. Ideal for grid-connected and remote power systems, the SAPC-175 modules offer the maximum usable power per square foot of solar array.

- High-power module using 125mm single crystal silicon solar cells with 13.45% module conversion efficiency
- Bypass diode minimizes the power drop caused by shade
- Textured cell surface to reduce sunlight reflection
- Tempered glass, EVA resin, and weatherproof film, and anodized aluminum frame for extended outdoor use
- Nominal 24VDC output, perfect for grid-connected systems
- UL Listings: UL 1703, cUL
- 25-year limited warranty on power output

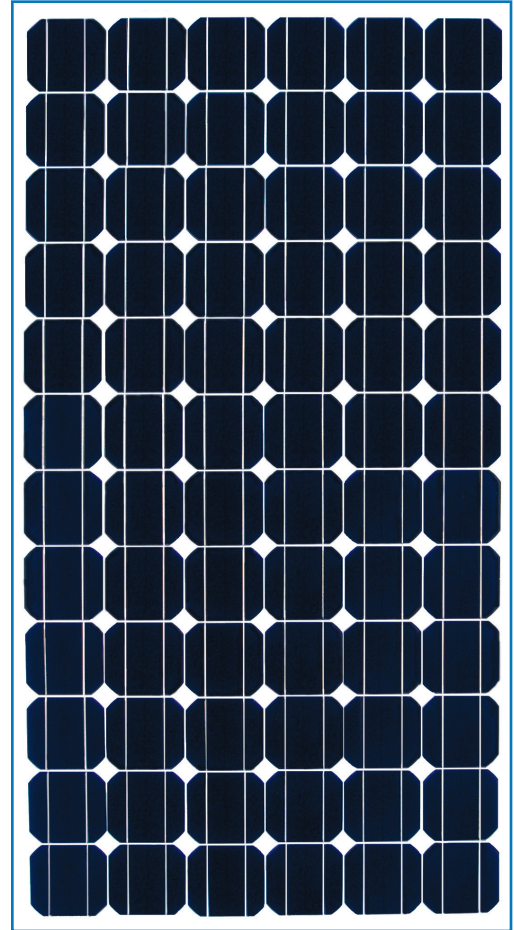

SAPC-175 Solar Module Pictured

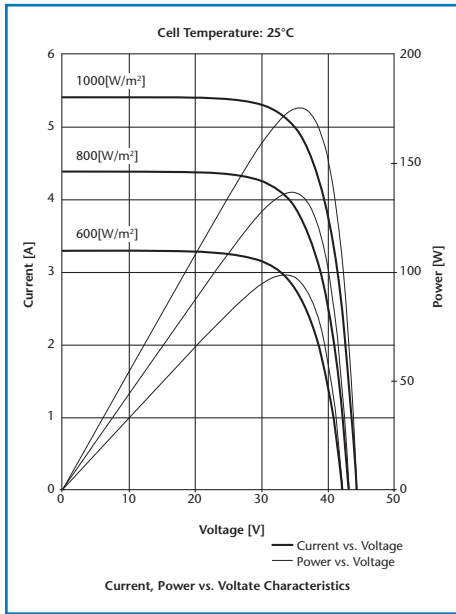

SAPC-175 IV Curves

Electrical Data


The electrical data applies to standard test conditions (STC): Irradiance at the module level of 1,000 W/m² with spectrum AM 1.5 and a cell temperature of 25° C

Power (max.)	P _p (watts)	175W
Voltage at maximum-power point	V _p (volts)	35.4V
Current at maximum-power point	I _p (amps)	4.95A
Open-circuit voltage	V _{oc} (volts)	44.4V
Short-circuit current	I _{sc} (amps)	5.40A

The rated power may only vary by -5/+10%. Other electrical characteristics may only vary by +/- 10%.

Dimensions and Weights

	175W Module
Length mm (in)	1575 (62.01")
Width mm (in)	826 (32.52")
Depth mm (in)	46 (1.81")
Weight kg (lbs)	16 kg (35.3 lbs)
Area m ² (ft ²)	1.299 (13.99)

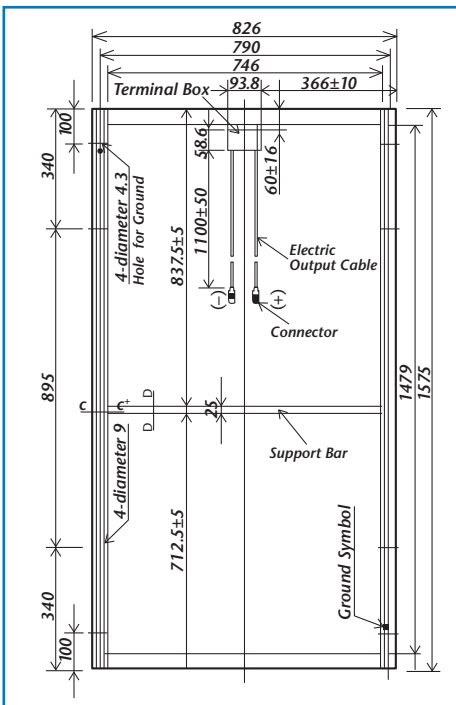

SAPC-175 Physical Specifications

Characteristic Data

	175W Module
Solar cells per module	72
Type of solar cell	Single-crystal silicon solar cells, 125 mm square
Connections	Multi-Contact Connector
Fuse	10 Amp

Limits

Maximum system voltage	600V DC
Operating module temperature	-40° to +90° C
Dielectric voltage withstood	2200V max.

The right is reserved to make technical modification.
For detailed product drawings and specifications please contact SCHOTT Solar or an authorized reseller.



SCHOTT Solar, Inc.

U.S. Headquarters and Manufacturing
4 Suburban Park Drive
Billerica, MA 01821
Toll free: 800-977-0777
Fax: 978-663-2868
Email: info.solar@us.schott.com
www.us.schott.com/solar

U.S. Sales and Marketing
2260 Lava Ridge Court, Suite 102
Roseville, CA 95661
Toll free: 888-457-6527
Fax: 916-784-9781

SCHOTT
solar